

P-Lock 61413X SERIES - C14/C13

SSEMCO

FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection.
- Patented C14 positive mechanism locks with **SSEMCO** P-Lock outlets and is backward compatible with any standard C13 outlets.
- Fit for high density multi-outlets design
- Rated up to 15 amps
- Various colors / lengths available



TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	IEC 60320
High Potential Test Voltage	2000VAC (1min 50Hz)
Rating	UL/cUL : 10A/13A/15A 250VAC VDE : 10A 250VAC
Operation Temperature	-25°C ~ +70°C
Flammability Corresponding to	Plug : UL 94V-2 or better; Cable: UL VW-1, IEC60332-1. Cat F2
Cable Option	For North America : 18AWG 3G SVT / 16AWG 3G SJT / 14AWG 3G SJT For Europe : H05VV-F 3G 0.75mm ² / 1.0 mm ²

COMMON APPLICATIONS


- Data Centers
- Medical Devices
- Automation Industry
- Industrial Equipment
- Architectural Devices
- Broadcasting Stations
- Critical Power Management

APPROVALS



ORDERING INFORMATION

61413 X - XX XYZ X

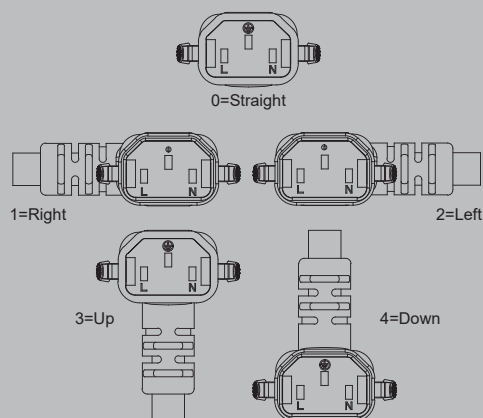

COLOR CODE :

0=Black, 1=Gray, 2=Blue, 4=Green,
6=Orange, 7=Red, 8=Yellow, 9=White

CABLE LENGTH :

For North America : XY=feet, Z=inch
For Europe & Int'l : X=meter, YZ=cm

WIRE TYPE :

For North America : 94=18AWG/SVT, 95=18AWG/SJT, 85=16AWG/SJT, 75=14AWG/SJT
For Europe : 13=0.75mm²/H05VV-F, 23=1.0mm²/H05VV-F