

FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection
- Patented C20 positive mechanism locks with SSEMCO P-Lock outlets and is backward compatible with any standard C19 outlet
- Fit for high density multi-outlets design
- Multi-angle plug option
- Rated up to 15 Amps
- Various colors / length available



TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	IEC 60320
High potential test voltage	2000VAC (1min 50Hz)
Rating	UL/cUL : 15A 250VAC
Operation temperature	-20°C ~ +70°C
Flammability corresponding to	Plug/Connector: UL 94V-2 or better Cable: UL VW-1, IEC60332-1, Cat F2
Conductor Size Option	For North America : 14AWG

COMMON APPLICATIONS


- Data centers
- Medical devices
- Automation Industrial
- Industrial Equipment
- Architectural devices
- Broadcasting stations
- Critical Power Management



ORDERING INFORMATION


62015X - XX XYZ X

Plug Angle Option

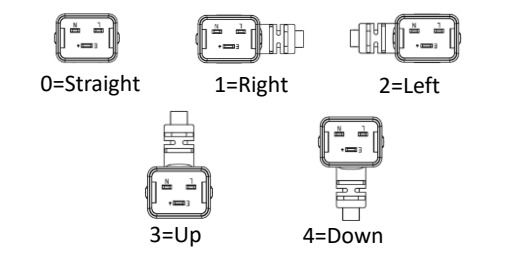

0=Straight 1=Right 2=Left
3=Up 4=Down

Color Options: (Actual color may vary)

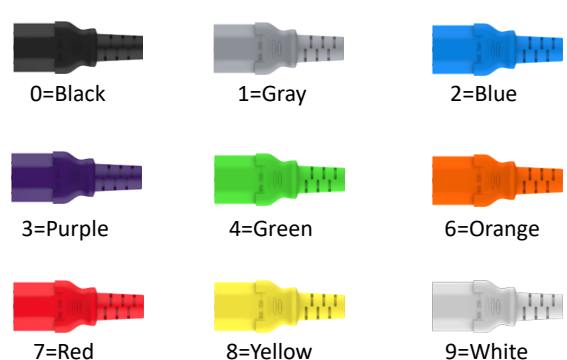

0=Black 1=Gray 2=Blue
3=Purple 4=Green 6=Orange
7=Red 8=Yellow 9=White

WIRE TYPE:
For North America:
75=14AWG/SJT

CABLE LENGTH:
For North America: XY=feet, Z=inch
For Europe: X=meter, YZ=cm