

P-Lock 61419X SERIES - C14/C19

SSEMCO

FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection.
- Patented C14 positive mechanism locks with **SSEMCO** P-Lock outlets and is backward compatible with any standard C13 outlets.
- Fit for high density multi-outlets design
- Rated up to 15 amps
- Various colors / lengths available



TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	UL 817
High Potential Test Voltage	2000VAC (1MIN 50HZ)
Rating	UL/CUL : 13A/15A 250VAC
Operation Temperature	-25°C ~ +70°C
Flammability Corresponding to	PLUG : UL 94V-2 OR BETTER; CABLE: UL VW-1
Cable Option	16AWG 3G SJT / 14AWG 3G SJT

COMMON APPLICATIONS


- Data Centers
- Medical Devices
- Automation Industry
- Industrial Equipment
- Architectural Devices
- Broadcasting Stations
- Critical Power Management

APPROVALS



ORDERING INFORMATION

61419 X - XX XYZ X

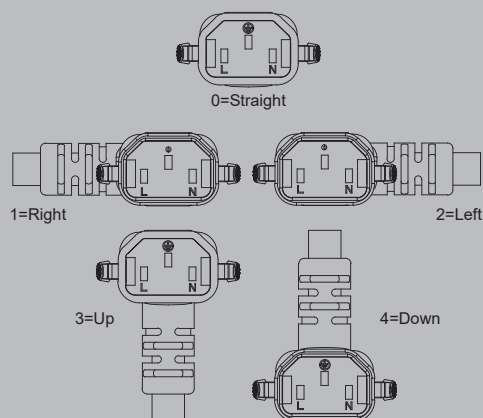

COLOR CODE :

0=Black, 1=Gray, 2=Blue, 4=Green,
6=Orange, 7=Red, 8=Yellow, 9=White

CABLE LENGTH :

XY=feet, Z=inch

WIRE TYPE :

85=16AWG/SJT, 75=14AWG/SJT