

# P-Lock 62019X SERIES - C20/C19

# SSEMCO

## FEATURES

- Revolutionary positive securing system prevents unintentional power disconnection.
- Patented C20 positive mechanism locks with **SSEMCO** P-Lock outlets and is backward compatible with any standard C19 outlets.
- Fit for high density multi-outlets design
- Rated up to 20 amps
- Various colors / lengths available



## TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Standard	IEC 60320
High Potential Test Voltage	2000VAC (1min 50Hz)
Rating	UL/cUL : 15A/20A 250VAC VDE : 16A 250VAC
Operation Temperature	-25°C ~ +70°C
Flammability Corresponding to	Plug : UL 94V-2 or better; Cable: UL VW-1, IEC60332-1. Cat F2
Cable Option	For North America : 14AWG 3G SJT / 12AWG 3G SJT For Europe : H05VV-F 3G 1.50mm <sup>2</sup> ~2.50mm <sup>2</sup>


## COMMON APPLICATIONS

- Data Centers
- Medical Devices
- Automation Industry
- Industrial Equipment
- Architectural Devices
- Broadcasting Stations
- Critical Power Management

## APPROVALS



## ORDERING INFORMATION

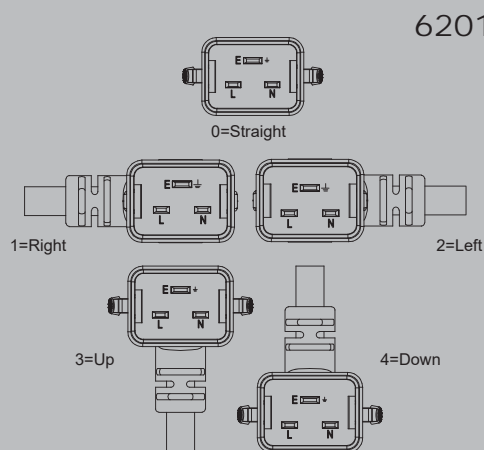

62019 X - XX XYZ X

### COLOR CODE :

0=Black, 1=Gray, 2=Blue, 4=Green,  
6=Orange, 7=Red, 8=Yellow, 9=White

### CABLE LENGTH :

For North America : XY=feet, Z=inch  
For Europe & Int'l : X=meter, YZ=cm

### WIRE TYPE :

For North America : 75=14AWG/SJT, 65=12AWG/SJT  
For Europe : 33=1.5mm<sup>2</sup>/H05VV-F, 53=2.5mm<sup>2</sup>/H05VV-F