


FEATURES:

- Multi panel thickness with high retention terminal
- Optional terminals design for 6.3mm faston and wire solder
- Solder terminals accept 12AWG and 10AWG wire
- Patented C13 positive mechanical locks with SSEMCO P-Lock plug and is backward compatible with any standard C14 plug
- Rated UL94V-0 & Halogen-Free

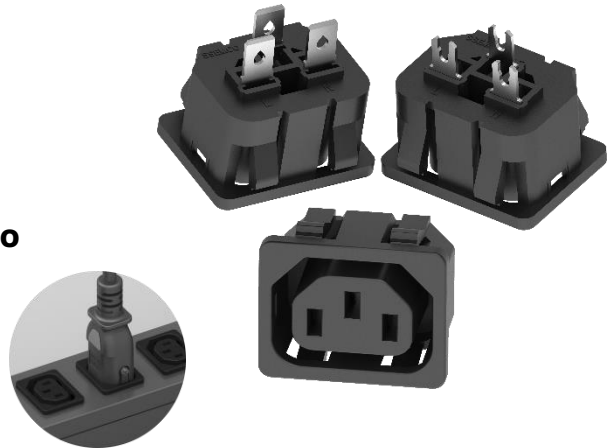

P-Lock Ready

TECHNICAL SPECIFICATIONS

SPECIFICATION	DESCRIPTION	DIMENSIONS (UNIT: mm)
Standard	IEC 60320-2-2 Sheet F	
Dielectric Strength	2000VAC (1min 50Hz)	
Insulation Resistance	Over 100MΩ at 500V DC	
Material	PC 94V-0, Halogen-free	
Panel Thickness	1.0~1.7mm	
Rating	cTUVus : 15A 250VAC TUV:10A 250VAC	
Operation Temperature	-5°C ~ +70°C	
Approvals	For North America: UL60320 Certified by cTUVus*	
	For Europe: IEC60320 Certified by TUV	

*cTUVus is equivalent to UL/cUL


ORDERING INFORMATION

R01381 - M1 X 3 YY

X=Color Options:



YY=Terminal Type:

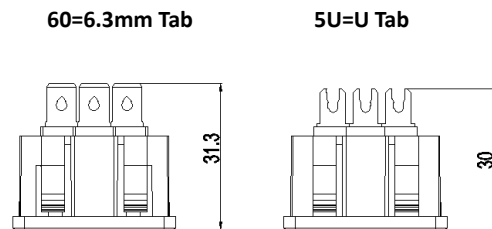

*Actual color may vary.