






## R013SN SERIES





US Patent

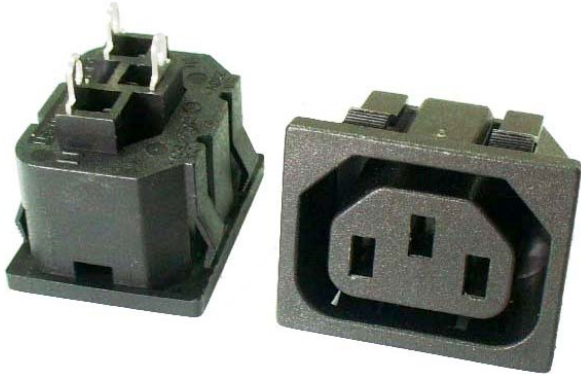

SPECIFICATION	DISCRIPTION
Standard	IEC 60320 C13
Insulation Resistance	Over 100MΩ at 500V DC
Dielectric Strength	2000V AC 1 Minute
Material	Thermoplastic 94V-2~V-0
MAX Operating Temperature	≤105°C
Locking Feature	Mate with SSEMCO Lock C14
Rating	15A 250V AC (UL)
	10A 250V AC (EUROPEAN)

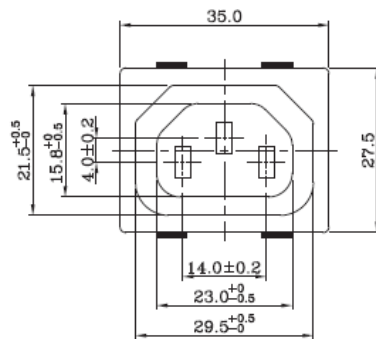

PANEL THICKNESS	A
0.8T~1.0T	25.0
1.0T~1.2T	25.2
1.2T~1.5T	25.5
2T	25.7
3T	25.7



PANEL CUT-OUT

### ORDERING INFORMATION

Unit : mm

R013SN	-00	5	3	4	Y	
IEC C13 SANP IN OUTLET	PANEL THICKNESS 00: 0.8-3.0mm	1:GRAY 5:BLACK 9:WHITE	2:BLUE 7:RED	NUMBER OF TABS	TAB WIDTH 3:2.8mm 4:4.0mm 5:4.8mm	8: STANDARD